

Apollo 1500



105
Thredbo



175
Franklin



515
Pyrenees



525
Alpine Gum



535
Derwent



545
Blackbutt



551
Daintree



556
Spotted Gum



571
Sherbrooke



721
Cumberland



730
Boston



790
Midnight

Specifications and colourations are subject to manufacturing tolerances. As part of the Godfrey Hirst continuous improvement program, Godfrey Hirst reserves the right to change the specifications of or delete colours of this product without notice. While all care is taken, product images may vary in colour due to possible printing process variations. Images do not seek to duplicate the exact visual appearance, but serve merely as a guide or point of reference.

Apollo 1500

Apollo 1500 is a stunning hybrid floor that is extremely hard wearing and stable with a waterproof surface[^], making it perfect for use in all areas of your home. With micro bevel edges and an embossed matte finish, Apollo 1500 authentically replicates a natural timber wood grain look. A scratch and stain resistant surface coating means Apollo 1500 can easily withstand the everyday wear and tear of busy family homes.

Technical Data


Type:	Hybrid Flooring	Finish:	Matte
Dimensions:	1500mm x 180mm	Surface:	Embossed
Thickness:	6.5mm	Top Layer:	Decorative Film & Wear Layer
Wear Layer:	0.5mm	Substrate Layer:	Trigon® Core Technology (Limestone Composite)
Units Per Box:	6 boards	Backing Layer:	1.5mm Acoustic Backing
m² per box:	1.62	Profile:	Micro Bevel
m² per pallet:	113.4	Coating System:	PUR & Scratch Resistance
Colours:	12	Installation Method:	Uniclic®
Country of Origin:	China		

Performance

Dimensional Stability:	(ISO 23999) Length: 0.05%, Width: -0.00%, Curling: 0.00%	Light Reflectance Values:	Available on Request
Abrasion Rating:	(EN 660-2) Group T	Flammability:	(EN ISO 9239) CRF 10.9kW/m ²
E3 Internal Moisture:	All wet areas - E3/AS1 – 3.0 Watersplash – (Alternative Solution) [^]	Smoke Value:	(EN ISO 9239) 81% minutes
Impact Sound Reduction:	Please refer to Godfrey Hirst Acoustic Performance specification sheet	Slip Resistance:	(AS 4586) P3
Light Fastness:	(EN ISO 105-B02) Grade 6		

Sustainability

Product Transparency:	Global Green Tag, GreenRate Level A certified
Accreditation:	Manufactured under a quality and environmental system certified and complying with ISO 9001 and ISO 14001 by an accredited certification body.
Indoor Air Quality:	Green Building Council Compliant for VOC emission rate limits

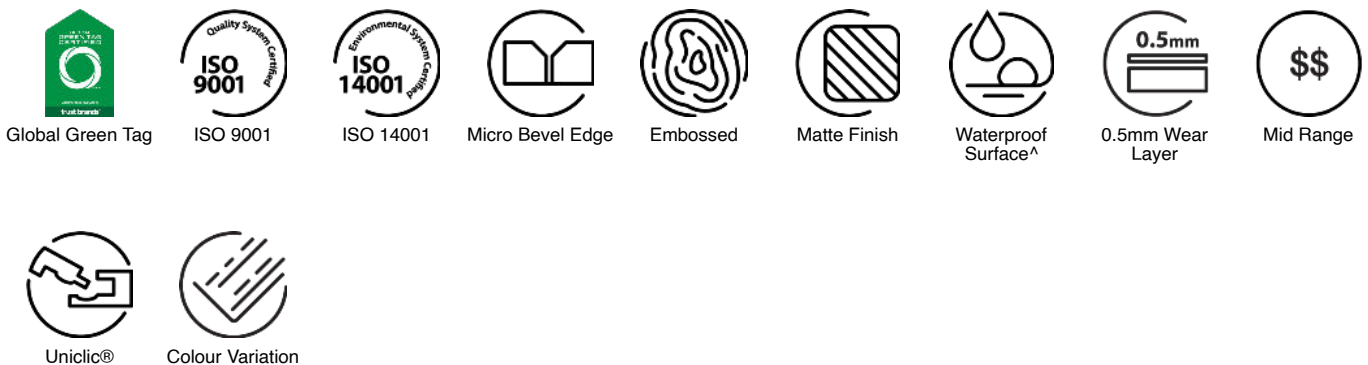

All Godfrey Hirst Hybrid floors must be installed in accordance with relevant New Zealand Standards and in conjunction with the Godfrey Hirst Hybrid Flooring Installation Instructions. Warranty: All Godfrey Hirst floors carry a warranty supported by New Zealand after sales service. The Godfrey Hirst warranty is applicable to all Godfrey Hirst floors, sold in New Zealand. *As a New Zealand manufacturer, we endorse and recognise all rights of the consumer under the Consumer Guarantees Act 1993 (the "CGA") and further agree to match any performance guarantee or warranty offered in the market place, at the time of purchase, on any product which is equivalent to ours, where that performance guarantee or warranty offers rights to the consumer in addition to those under the CGA. For further information as to the warranty, installation, care and characteristic of this hard flooring please visit www.godfreyhirst.com or call 0800 500 210. [^]Subject to proper installation, maintenance and local building code/regulatory approval. ~Test results and certificates are available on request.