

WHO ARE WE?


At Belgotex we believe that everything we do should creatively challenge the flooring / interiors status quo. Belgotex has 30 years proven experience in the New Zealand flooring market. We stand by our products, and pride ourselves on the innovation and quality that we bring to the market every day.

Why choose Belgotex Luxury Vinyl Tiles?

These ranges have been designed to fit current and future trends in the New Zealand market. As well as choosing a beautiful floor, our Luxury Vinyl Tiles will also provide many more benefits for your space. All of our products have a Superguard® protective layer, which means that your floor will resist stains, scratches, and scuffs better than other floors, so you can spend more time enjoying your floor, and less time cleaning it. Your floor will be the envy of anyone that sees it!



LUXURY VINYL TILES

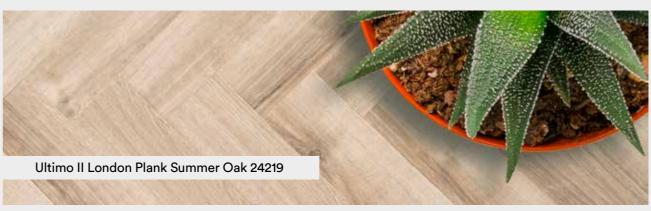

PRIMERO II 2.25mm thickness with a 0.3mm wear layer. Residential collection. Realistic, natural look. A choice of 9 carefully chosen wood patterns and colours. Class 23 Domestic Heavy / Class 31 Commercial Light.	5
 ULTIMO II 2.5mm thickness with a 0.55mm wear layer. Longest and widest plank size. Ideally suited for both residential and commercial environments. 9 beautiful wood patterns and colours to choose from. Class 23 Domestic Heavy / Class 33 Commercial Heavy / Class 42 Industrial Medium. 	11
MATRIX ACOUSTIC 5.0mm thickness with a 0.7mm wear layer. Acoustic - it will reduce noise levels in a room by up to 8 decibels*. Extremely durable. Seamless transition to carpet tiles or other flooring. 7 great colours and patterns. Class 23 Domestic Heavy / Class 34 Commercial Very Heavy / Class 43 Industrial Heavy.	17
 AMTICO FIRST 2.0mm thickness with a 0.3mm wear layer. Premium LVT. 13 stocked colours and a further 26 indent colours. Highly realistic finish with a robust construction. Class 23 Domestic Heavy / Class 31 Commercial Light. 	23
AMTICO SPACIA ACOUSTIC 3.5mm thickness with a 0.55mm wear layer. Premium LVT. Acoustic - it will reduce noise levels in a room by up to 18 decibels*. 7 stocked colours and a further 97 indent colours. Class 23 Domestic Heavy / Class 33 Commercial Heavy / Class 42 Industrial Medium * Tested to ISO 10140-3. The colours shown may vary slightly from the actual product and should be used as a guide only.	29



PRIMERO II

















Underfloor Heating

Compatible

Construction	Luxury Vinyl Tile
Plank Size	163mm x 988mm
Tiles per Carton	24pcs / 3.87m²
Wear Layer Thickness	0.30mm
Total Thickness	2.25mm
Bevel	4-sided micro-bevel
Surface Protection	Superguard [®]
Slip Resistance	DS - R10 (EN 13893 / DIN 51130)
Fire Test	ISO 9239-1
Classification	Class 23 Domestic Heavy / Class 31 Commercial Light
Warranties	20 Year Residential Warranty / 10 Year Commercial Warranty
Installation	Please contact Gilt Edge Industries for all adhesive and installation instructions. NB: If recommended adhesive is not used, claims will not be accepted.

- For samples, range and warranty details please contact us on 0800 377 753 or www.belgotex.co.nz
- Specifications are based on averages from manufacturing processes and may vary within normal industry tolerances.
- This product is intended for use solely as an indoor floor covering and is not recommended or sold for any other purpose.
- Use entryway systems outside each entrance to prevent dirt, sand, grit and other substances from being tracked onto floor.
- Rubber Migration: Rubber migration (also known as Plasticiser Migration) is a condition that can cause vinyl to discolour. It is caused by rubber or latex products, eg rubber or latex-soled slippers, shoes and rubber backed mats, coming into contact with the vinyl over a constant period of time. It is neither a manufacturing nor an installation fault and therefore is not covered by our warranties.

Must be laid in accordance with AS/NZ Installation Standards.



PRIMERO II

6

EVERGREEN OAK MAJOR OAK



PRIMERO II

SUMMER OAK







ULTIMO II





















Construction	Luxury Vinyl Tile
Plank Size	Classic Plank - 196mm x 1320mm London Plank - 94mm x 282mm
Tiles per Carton	Classic Plank - 14pcs / 3.62m² London Plank - 92pcs / 2.44m²
Wear Layer Thickness	0.55mm
Total Thickness	2.5mm
Bevel	V-groove, 4-sided bevel
Surface Protection	Superguard®
Slip Resistance	DS - R10 (EN 13893 / DIN 51130)
Fire Test	ISO 9239-1
Classification	Class 23 Domestic Heavy / Class 33 Commercial Heavy / Class 42 Industrial Medium
Warranties	20 Year Residential Warranty / 10 Year Commercial Warranty
Installation	Please contact Gilt Edge Industries for all adhesive and installation instructions. NB: If recommended adhesive is not used, claims will not be accepted.

- For samples, range and warranty details please contact us on 0800 377 753 or www.belgotex.co.nz
- Specifications are based on averages from manufacturing processes and may vary within normal industry tolerances.
- This product is intended for use solely as an indoor floor covering and is not recommended or sold for any other purpose.
- Use entryway systems outside each entrance to prevent dirt, sand, grit and other substances from being tracked onto floor.
- Rubber Migration: Rubber migration (also known as Plasticiser Migration) is a condition that can cause vinyl to discolour.

It is caused by rubber or latex products, eg rubber or latex-soled slippers, shoes and rubber backed mats, coming into contact with the vinyl over a constant period of time. It is neither a manufacturing nor an installation fault and therefore is not covered by our warranties.

Must be laid in accordance with AS/NZ Installation Standards.



ULTIMO II



ULTIMO II



A smaller plank offers more creative installations.

LONDON PLANK

SUMMER OAK



COLUMBIA PINE



24219 24244 24867





MATRIX ACOUSTIC





















Construction	Acoustic Luxury Vinyl Tile
Plank Size	178mm x 1220mm
Tiles per Carton	10pcs / 2.17m ²
Wear Layer Thickness	0.70mm
Total Thickness	5.0mm
Bevel	V-groove, 4-sided bevel
Surface Protection	Superguard®
Slip Resistance	DS - R9/R10 (EN 13893 / DIN 51130)
Fire Test	ISO 9239-1
Acoustic Insulation	Δ Lw = 8 dB (EN ISO 10140-3)
Classification	Class 23 Domestic Heavy / Class 34 Commercial Very Heavy / Class 43 Industrial Heavy
Warranties	20 Year Residential Warranty / 10 Year Commercial Warranty
Installation	Please contact Gilt Edge Industires for all adhesive and installation instructions. NB: If recommended adhesive is not used, claims will not be accepted. Must be laid in accordance with AS/NZ Installation Standards.

- For samples, range and warranty details please contact us on 0800 377 753 or www.belgotex.co.nz
- Specifications are based on averages from manufacturing processes and may vary within normal industry tolerances.
 This product is intended for use solely as an indoor floor covering and is not recommended or sold for any other purpose.
- Use entryway systems outside each entrance to prevent dirt, sand, grit and other substances from being tracked onto floor.
- Rubber Migration: Rubber migration (also known as Plasticiser Migration) is a condition that can cause vinyl to discolour. It is caused by rubber or latex products, eg rubber or latex-soled slippers, shoes and rubber backed mats, coming into contact with the vinyl over a constant period of time. It is neither a manufacturing nor an installation fault and therefore is not covered by our warranties.

MATRIX ACOUSTIC





MATRIX ACOUSTIC

SWEDISH PINE TRADITIONAL OAK 2242 2965 1826 1832





AMTICO FIRST






















Luxury Vinyl Tile Construction Plank Size 184.2mm x 1219.2mm Various other sizes available indent. Tile Size 457.2mm x 457.2mm - Ceramic Sable SF3S3593 & Limestone Cool SF3S1561 304.8mm x 609.6mm - Linear Stone Shale SF3S3606 Various other sizes available indent. Wear Layer Thickness 0.3mm Total Thickness 2.0mm Surface Protection Urethane Slip Resistance DS-R10 (DIN 51130 / EN 13893) Fire Rating CRF ≥11.2kW/m² (ISO 9239-1) Classifications Class 23 Domestic Heavy / Class 31 Commercial Light Warranties 12 Year Residential Warranty / 7 Year Commercial Warranty Installation Please contact Gilt Edge Industries for all adhesive and installation instructions.

NB: If recommended adhesive is not used, claims will not be accepted. Must be laid in accordance with AS/NZ Installation Standards.

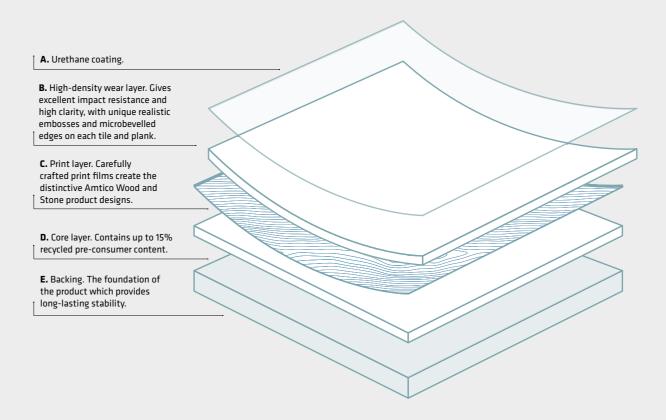

AMTICO FIRST

24

LUXURY VINYL TILES



WOODS **STONES** Ceramic Sable SF3S3593 Limestone Cool SF3S1561 Sun Bleached Oak Village Oak SF3W3022 White Oak Linear Stone Shale Weathered Oak SF3W2531 SF3W2524 SF3W2548 SF3S3606





AMTICO SPACIA ACOUSTIC



















Construction Luxury Vinyl Tile 184.2mm x 1219.2mm Plank / Tile Sizes Various other sizes available indent. 457.2mm x 457.2mm - Monument Concrete SS5S3072 & Ceramic Flint SS5S2594 Cross Grain Size Various other sizes available indent. Wear Layer Thickness 0.55mm Total Thickness 3.5mm Surface Protection Urethane Impact Sound Reduction 18dB (EN ISO 717-2) Class 23 Domestic Heavy / Class 33 Commercial Heavy / Class 42 Industrial Medium Classifications Warranties 25 Year Residential Warranty / 10 Year Commercial Warranty Installation Please contact Gilt Edge Industries for all adhesive and installation instructions. NB: If recommended adhesive is not used, claims will not be accepted. Must be laid in accordance with AS/NZ Installation Standards.

A. Quantum Guard Elite urethane coating. Amtico's superior mark and scuff resistance layer.


B. High-density wear layer. Withstands intense use and resists indentation, retaining clarity.

C. Print layer. The carefully crafted Wood, Stone and Abstract designs.

D. Dual Core layer. Comprising 30% recycled content.

E. Backing. Provides a strong foundation and guarantees high performance. Created using 100% recyclable materials.

F. Optional Acoustic. (not available on Amtico First). Visco elastic polymer in a closed cell foam structure offering sound reduction of up to 18 dB with a residual indentation of <0.20mm.

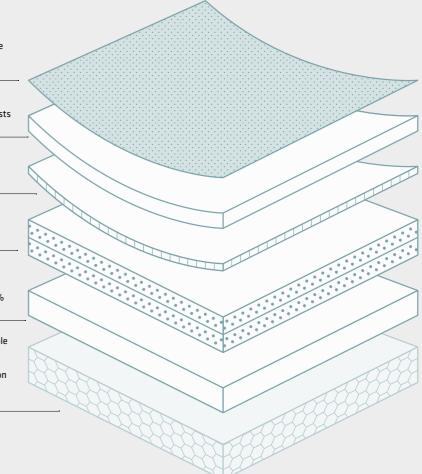

SPACIA ACOUSTIC

WOODS



Dusky Walnut SS5W2542

30

SS5W2541

SS5W2533

SS5W2514

SS5W2654

SPACIA ACOUSTIC

STONES



SS5S2594

BELGOTEX.CO.NZ

SS5S3072



BELGOTEX.CO.NZ

31



LVT

Installation

Dryback is the more traditional type of plank and method of installation. We recommend having your floor installed by a registered and approved New Zealand Installation contractor or dealer.

The planks are glued with a special adhesive to a thoroughly prepared surface or subfloor that is hard, dry, and flawless. For full installation instructions visit our website or contact us.

Care and Maintenance

Good cleaning and maintenance helps to preserve the appearance and extend the life of your floor. Cleaning frequency depends on how intensely the floor is used, how much foot traffic it gets, how dirty it is, what colour, and what type it is. Everyday cleaning can be done with a broom or vacuum cleaner, and then either using a damp microfibre mop or regular mop with a non-aggressive neutral pH cleaner. Belgotex Luxury Vinyl Tiles are given extra protection with the Superguard® layer on top of the resistant wear layer. This layer protects against dirt, stains, scratches, and scuffs, and will make cleaning your floor easier. For full cleaning and maintenance instructions visit our website or contact us.

Tips

- Always wipe up spillages with a damp cloth before they penetrate into the floor and cause permanent discolouration.
- Follow the detergent manufacturer's instructions with regards to mixing and quantities.
- Use felt pads under hard furniture that is used over the flooring to avoid any scratches or dents in the flooring.

FREQUENTLY ASKED QUESTIONS

What is LVT?

Vinyl plank flooring is made of layers of materials pressed together to create hard wearing flooring.

These layers include the protective coating, the wear layer, the design layer, the print layer, glass fibre layers, and the backing. Belgotex LVT includes wood planks in 3 different qualities to suit many different environments. Our LVT products come either in a dryback or acoustic construction; see the pages on each LVT to show the construction of each product.

Can I use a steam mop?

We don't recommended that you use a steam mop on <u>any</u> vinyl flooring. The high heat produced will strip the protective wear layer, and cause the product to attract dirt and have a faded appearance.

Does Belgotex LVT require a lot of maintenance?

No it doesn't. It is low maintenance, and very easy to clean. The Superguard® surface layer means that your floor will resist stains, scratches, and scuffs better than other floors, so you can spend more time enjoying your floor, and less time cleaning it.

Can I use underfloor heating with Belgotex LVT?

Our products can be installed over underfloor heating, provided it is done professionally. It is also suitable for underfloor cooling if required. See our installation instructions for more information.

Will LVT be durable?

LVT is the perfect flooring solution for busy family households or commercial environments alike. Our wood look LVT is durable and copes beautifully with the demands of everyday life. Its enhanced surface treatment Superguard® surface treatment offers outstanding slip, scuff, and soiling resistance. It will last the test of time in your space.

Are Belgotex LVT floors suitable for bathrooms and kitchens?

Yes absolutely. They are hard wearing and moisture resistant, which makes them well suited to most spaces (excluding wet spaces like showers and saunas).

For heavier wearing commercial kitchens, higher slip resistance products may be more suitable – see technical specifications or contact us for more information.

Can I install Belgotex LVT myself?

Belgotex LVT is very easy to install. However, we advise that you have your floor installed by a registered and approved New Zealand installation contractor or dealer. This should guarantee your happiness with your floor, together with the benefits of the full warranty.

Where can I purchase Belgotex LVT?

You can purchase Belgotex LVT from many of our registered dealerships nationwide. To find a dealer, visit the 'Find a Retailer' section on our website, or contact us on 0800 377 753.

