Disruptive Path



TECHNICAL SPECIFICATIONS

Collection:	Art Style
Country of Origin:	Australia
Colours:	12 Standard
Yarn:	Colorstrand® Solution Dyed Nylon
Surface Texture:	Patterned Textured Loop Pile
Gauge:	47/10cm (1/12th Gauge)
Product Thickness:	7.00mm
Pile Weight:	575g/m²

Backing:	Enviro Bac®
Carpet Tiles & Planks Size:	304.8mm x 914.4mm
Installation Method:	Herringbone, Half-Lap, Random, Plank Half-Lap, Brick, Ashlar
Type:	Carpet Tiles and Planks
Units Per Box:	20.00
m² per box:	5.574
m² per pallet:	150.5
Pattern Repeat:	Not Applicable

PERFORMANCE

(AATCC 134) <3.5KV at 21°C & 20% Relative Humidity Anti-Static:

Flammability: Meets the requirements of NCC Spec. C1.10 relating to fire hazard properties for Class

2-9 buildings~

Colourfast to light: (ISO 105-B-02-1994) 6-7 Light Reflectance: Available on Request Stain Resistance: Sentry Plus Stain Protection ACCS Rating: Contract Extra Heavy Duty - 4 Star

Contract Warranty: GH Commercial provides comprehensive warranties for our products. All warranties are

issued on a project by project basis. Please contact us to discuss your requirements

Recommended Adhesive: Refer to our GH Commercial Adhesive Guide www.ghcommercial.com

Soil Resistance: Sentry Soil Protection

SUSTAINABILITY

PVC Minimisation: **PVC Free**

Green Building Council Compliant for VOC emission rate limits Indoor Air Quality:

Product Transparency: Declare Red List Free

Recycled Content: Colorstrand® yarn contains 34% pre-consumer recycled content.

Enviro Bac® backing contains a minimum of 10% pre-consumer recycled content.

Green Star: Environmental Certification Scheme (ECS) Level 4 Maximum Points

Accreditation: Manufactured under a quality, environmental and health and safety system certified and

complying with ISO 9001, ISO 14001 and ISO 45001 by accredited certification bodies.

AVAILABILITY

Other Options: Glueless Installation Method: FlexLok®












Disruptive Path



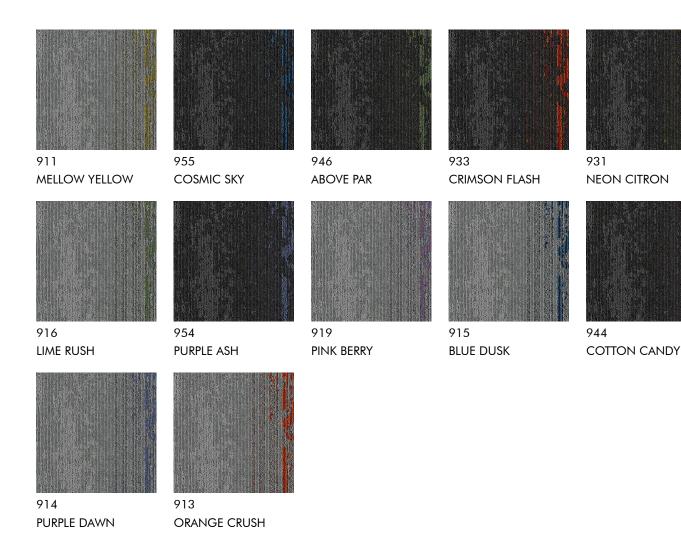

Specifications and colourations are subject to manufacturing tolerances. As part of the GH Commercial continuous improvement program, GH Commercial reserves the right to change the specifications of or delete colours of this product without notice. While all care is taken, product images may vary in colour due to possible printing process variations. Images do not seek to duplicate the exact visual appearance, but serve merely as a guide or point of reference.

All GH Commercial carpet tiles and planks must be installed in accordance with AS2455 Parts 1 & 2 (latest version) and the GH Commercial Carpet Tile/Plank Installation Instructions.

Chair pads are recommended under office chairs with roller castors to preserve appearance retention, act as a deterrent toward delamination and to prevent premature or accelerated wear. Walk-off tiles from the Tuff Stuff II Collection are recommended at entryways to reduce soiling. ~Test results and certificates are available on request.

*Guarantee is in addition to any rights consumers may have under Australian consumer laws.

Terms and conditions apply - for full information in respect to the scope of the guarantee please contact your GH Commercial Account Manager or our Head Office.