

Mediterranean Collection


Range 1 Data Information

Width: 2m & 3m

Wear Layer: 0.15mm

Warranty: 5 Years


Slip Resistance: R10




Metro Slate 909E
Tile size: 20cmx33cm



Coney Honey Oak
266M



Coney Boardwalk Oak
006M



Boston Steel
911D


Range 2 Data Information

Width: 2m & 3m

Wear Layer: 0.20mm

Warranty: 5 Years

Slip Resistance: R10



Aveo 090S



Vero 796L



Canyon 967D



Aged Oak 967M

Range 3 Data Information

Width: 2m & 3m

Wear Layer: 0.20mm

Warranty: 5 Years

Slip Resistance: R10



Lancaster 196M



Lancaster 965D



Aveo 8023

Polyflor Mediterranean Collection

Domestic Cushion Vinyl

Range 1 Data Information



Guarantee

Garantie

Garantie

Garantie



	Product information Produkt informatie	Produkt Daten Information produit		
	Total thickness Totale dikte	Gesamtstärke Epaisseur totale	EN 428	2,00 mm
	Wearlayer Slijtlaag	Nutzschicht Couche d'usure	EN 429	0,15 mm
	Width Breedte	Breite Largeur	EN 426	2m 3m 4m
	Standard length Standard rollengte	Standard Rollenlänge Longueur standard	EN 426	32 m
	Total weight Totaal gewicht	Total gewicht Poids total		1200 g/m ²
	Classification Classificatie	Klassifizierung Classification	EN 685	21 Domestic moderate

	Technical information Technische informatie	Technische Daten Information technique		
	Light stability Lichtechtheid	Lichtechtheit Résistance à la lumière	ISO 105-B02	≥ 6
	Dimensional stability Dimensionele stabiliteit	Dimensionsstabilität Stabilité dimensionnelle	EN 434	≤ 0,40%
	Underfloor heating Vloerverwarming	Fussbodenheizung Chauffage par le sol	EN 12667	Suitable Geschikt Geeignet Convenable
	Residual indentation Restindrukking	Eindruckverhalten Poinçonnement	EN 433	≤ 0,35 mm
	Reaction to fire Brandklasse	Brandverhalten Indice d'incendie	EN 13501-1	B _f S1
	Slipresistance Slipweerstand	Rutschhemmung Glissance	DIN 51130	

Product Information

Norm	EN ISO 26986			* check individual ref. for available widths
Intensity of use	ISO 10874 (EN 685)		22 Domestic general / medium	class
Total Thickness	EN ISO 24346 (EN 428)		2,40	mm
Wearlayer	EN ISO 24340 (EN 429)		0,20	mm
Abrasion group	EN 660-2		T	class
Total weight	EN ISO 23997 (EN 430)		1350	g/m ²
Standard width	EN ISO 24341 (EN 426)		2 - 3 - 4 *	m
Standard length	EN ISO 24341 (EN 426)		+/- 30	m

Technical Information

Dimensional stability	EN ISO 23999 (EN 434)		≤ 0,40	%
Curling	EN ISO 23999		≤ 8	mm
Light stability	EN ISO 105 B02		≥ 6	degree
Residual indentation	EN ISO 24343-1 (EN 433)		≤ 0,35	mm
Impact sound improvement	EN ISO 717/2		Δ Lw 16	dB
Dynamic coefficient of friction	EN 13893		> 0,6	
Slip resistance (ramp test with oil)	DIN 51130		R10	scale
Reaction to fire Report number ---- VNLf 031380.4	EN 13501-1		Bfl-s1	class
Underfloor heating	EN 12667		Suitable	
Thermal resistance	ISO 8302		0,016	m ² K/w
Thermal conductivity	EN 12524		0,15	W/m.K
Chemical resistance	ISO 26987 (EN 423)		resistant	
Static Electrical Propensity	EN 1815		< 2kV	On concrete

Environment



100% Recyclable.

- No heavy metals
- No solvents
- No Formaldehydes
- No harmful plasticizers



E1 means that the level of formaldehyde is inferior to 0.1ppm (= 0.12 mg/m³ of air)



100% phthalate free
*for all products produced from May 2017 onwards

This is illustrative by the choice of raw materials, of partners, of transport and of fabrication processes. Our selection of core materials is based on a combination of our clients' requirements for a quality product as well as requirements for a minimal impact on the environment. We are the leaders in terms of the implementation of clean renewable energy sources and we actively work towards the constant improvement of energy saving.



Our products are classified as A+ for the emission of volatile substances in inside air (compulsive sanitary labelling in France since January 2012)



Product Build

1. Wear layer
2. Design layer
3. Foam layer
4. Impregnation layer
5. Glass fibre interlayer
6. Backing



Features



Product Information

Norm	EN ISO 26986		* check individual ref. for available widths	
Intensity of use	ISO 10874 (EN 685)		21 Domestic moderate / light	class
Total Thickness	EN ISO 24346 (EN 428)		2,30	mm
Wearlayer	EN ISO 24340 (EN 429)		0,15	mm
Abrasion group	EN 660-2		T	class
Total weight	EN ISO 23997 (EN 430)		1365	g/m ²
Standard width	EN ISO 24341 (EN 426)		2 - 3 - 4 *	m
Standard length	EN ISO 24341 (EN 426)		15 - 30	m

Technical Information

Dimensional stability	EN ISO 23999 (EN 434)		≤ 0,40	%
Curling	EN ISO 23999		≤ 8	mm
Light stability	EN ISO 105 B02		≥ 6 - 7	degree
Residual indentation	EN ISO 24343-1 (EN 433)		≤ 0,35	mm
Impact sound improvement	EN ISO 717/2		Δ Lw 13	dB
Dynamic coefficient of friction	EN 13893		> 0,6	
Slip resistance (ramp test with oil)	DIN 51130		R10	scale
Reaction to fire Report number ---- VNLf 031380.4	EN 13501-1		Bfl-s1	class
Underfloor heating	EN 12667		Suitable	
Thermal resistance	ISO 8302		0,015	m ² K/w
Thermal conductivity	EN 12524		0,15	W/m.K
Chemical resistance	ISO 26987 (EN 423)		resistant	
Static Electrical Propensity	EN 1815		< 2kV	On concrete

Environment



100% Recyclable.

- No heavy metals
- No solvents
- No Formaldehydes
- No harmful plasticizers



E1 means that the level of formaldehyde is inferior to 0.1ppm (= 0.12 mg/m³ of air)



100% phthalate free
*for all products produced from May 2017 onwards

This is illustrative by the choice of raw materials, of partners, of transport and of fabrication processes. Our selection of core materials is based on a combination of our clients' requirements for a quality product as well as requirements for a minimal impact on the environment. We are the leaders in terms of the implementation of clean renewable energy sources and we actively work towards the constant improvement of energy saving.





Our products are classified as A+ for the emission of volatile substances in inside air (compulsive sanitary labelling in France since January 2012)



Product Build

1. PU lacquer
2. Wear layer
3. Design layer
4. Compact layer
5. Impregnation layer
6. Glass fibre interlayer
7. Backing

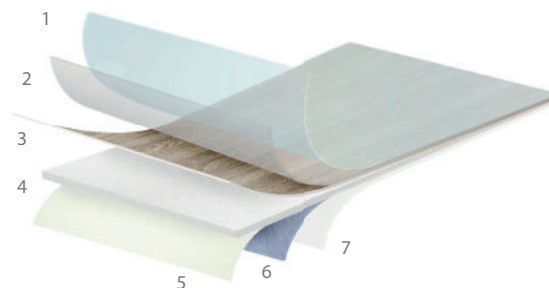

Features

